




# TESLA CYBERCAB

From 2026—Present  
2 doors / 2 seats / coupe

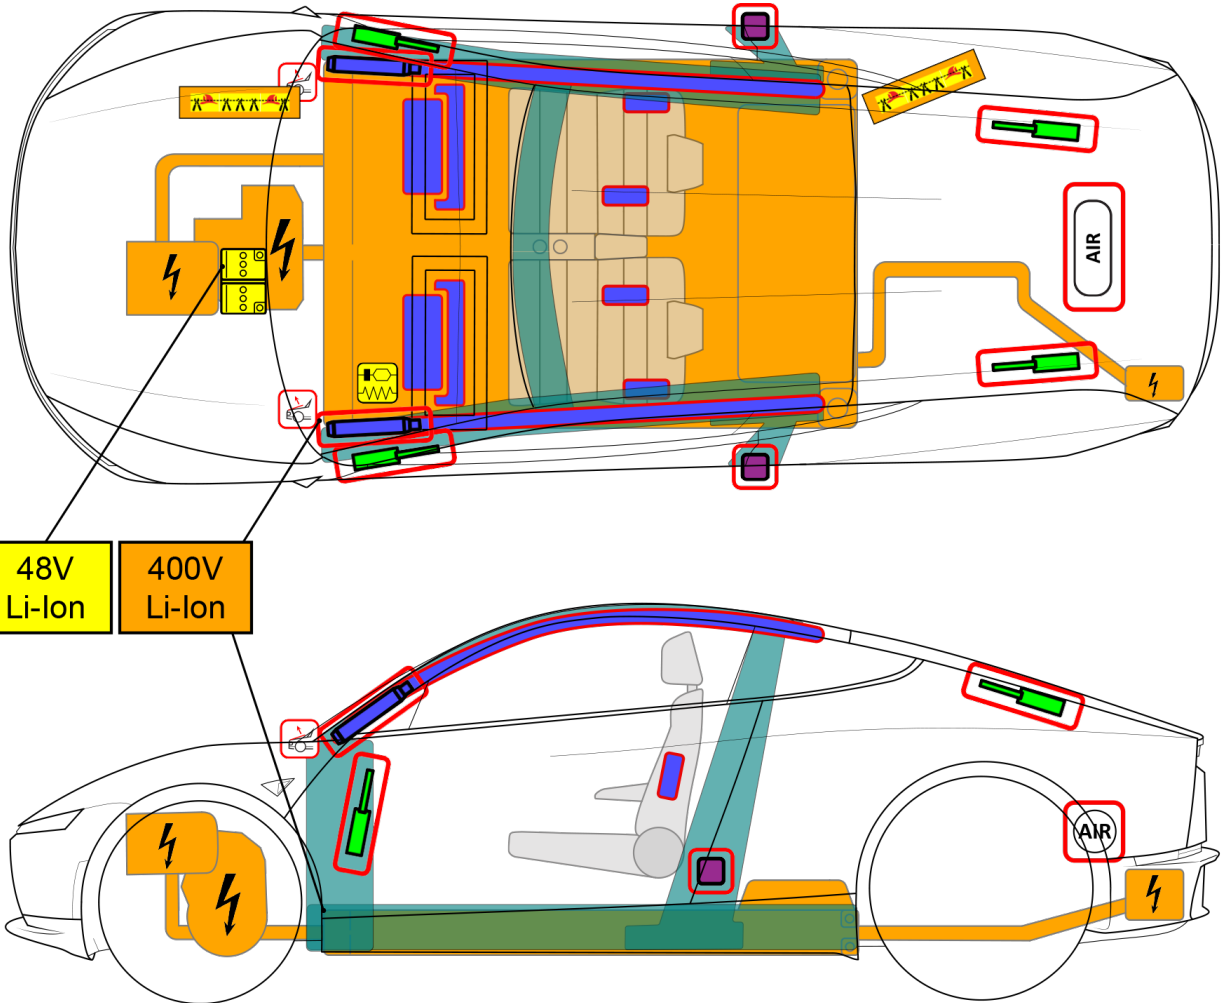

48V  
Li-Ion

400V  
Li-Ion

NOTE: Not all features present in all trims.

	Airbag		SRS control unit		Stored gas inflator		Seat belt pre-tensioner		Gas strut / Preloaded spring
	Battery low voltage		Battery pack, high-voltage		High voltage power cable		Cable cut		High strength zone
	Air tank		High voltage component						



# TESLA CYBERCAB


From 2026—Present  
2 doors / 2 seats / coupe



## 1. Identification / Recognition



QUIET MOVEMENT OR INSTANT RESTART CAPABILITY EXISTS UNTIL VEHICLE IS FULLY SHUT DOWN.

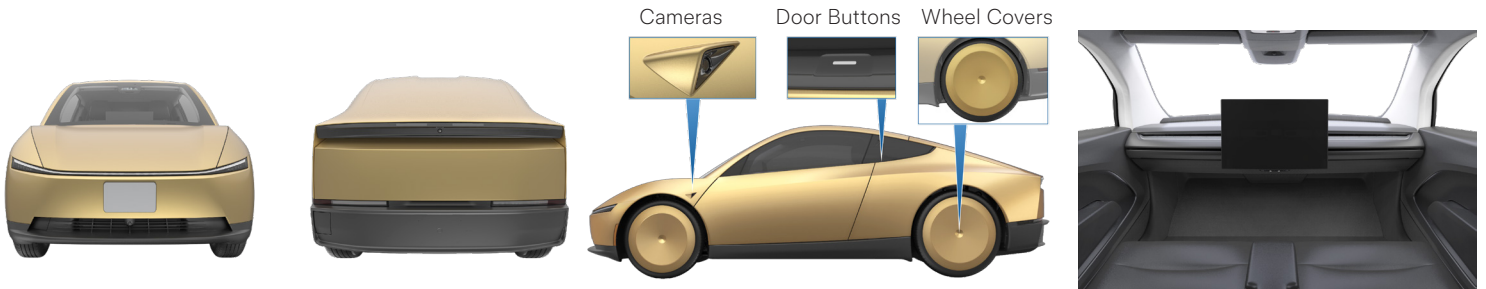


NOTE: The Cybercab wordmark can appear on the sides and trunk lid.

## 2. Immobilization / Stabilization / Lifting

### IMMOBILIZATION

1. REQUEST IMMOBILIZATION AT (512) 276-5391
2. CAGE VEHICLE
3. CHOCK WHEELS

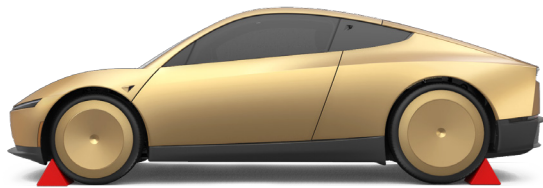


4. OPEN A DOOR AND PROP OPEN



Confirm immobilization with Tesla representative whenever possible.

### STABILIZATION / LIFTING POINTS

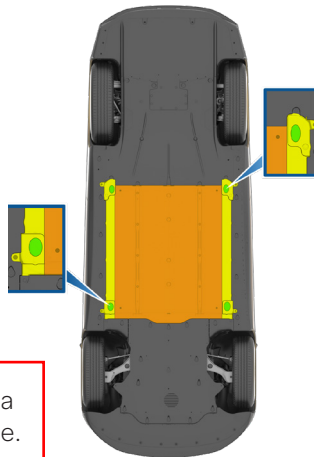

	Appropriate lift areas
	Safe stabilization points for Cybercab resting on its side
	High Voltage (HV) Battery (do not lift or stabilize)




Do not push on HV Battery.




## 3. Disable Direct Hazards / Safety Regulations



### ACCESS



### MAIN DISABLING METHOD

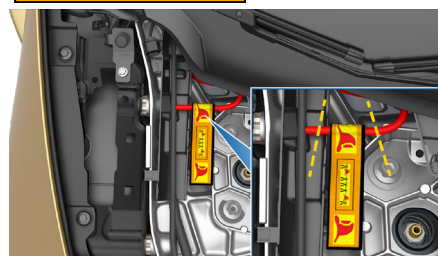

- Open the hood.
- Double cut the first responder loop.

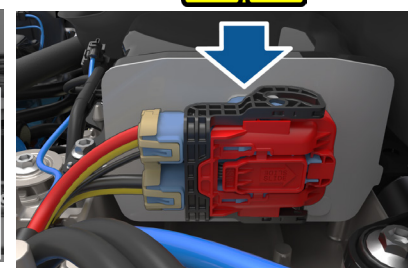

- Double cut negative cable (black with yellow stripe) to the 48V battery **only if necessary**.



Not every high voltage component is labeled. Always wear appropriate PPE. Always double cut the first responder loop. Do not attempt to open the high voltage (HV) battery.





**TESLA CYBERCAB**  
From 2026—Present  
2 doors / 2 seats / coupe



## 4. Access to the Occupants



Electrical and mechanical releases like doors and seat belts may be compromised after a collision. Damaged door struts can pop out when doors are extended.




NOTE: The seats and window buttons are electrically powered and may not function after a collision.

NOTE: Door can become heavy if damaged or if low voltage power unavailable. Prop door open so it doesn't close.

NOTE: After a collision, extrication may be required. Exterior panels are plastic. Door ring is high strength steel.

NOTE: The windshield is made of laminated glass. The moving door windows are tempered glass. Door windows can break when opening without power.


OPENING DOORS FROM OUTSIDE WITH POWER



OPENING DOORS FROM INSIDE WITH OR WITHOUT POWER



OPENING REAR TRUNK WITH POWER



OPENING HOOD FROM INSIDE WITH POWER


- Request assistance from Tesla Robotaxi First Responder Support.



OPENING WINDOWS WITH POWER



MOVING SEATS WITH POWER

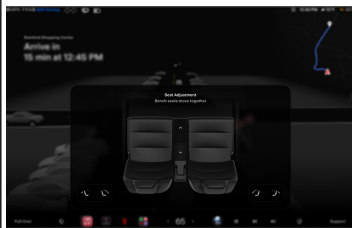


NON-OPERATIONAL WITHOUT POWER




OPENING HOOD WITHOUT POWER

- Use external power supply to OPEN

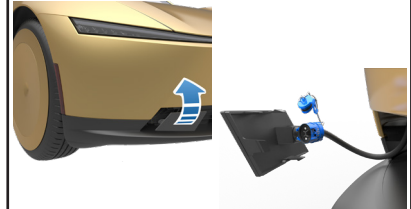


GLASS

- Laminated
- Tempered
- Plastic Applique

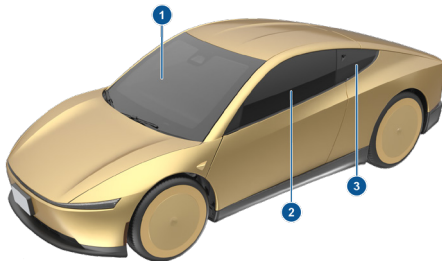

HIGH STRENGTH ZONES

- ULTRA-HIGH STRENGTH STEEL DOOR RING
- HIGH STRENGTH STEEL OVER-HEAD RAIL
- HIGH STRENGTH STEEL DOOR HINGES ARE VERY THICK

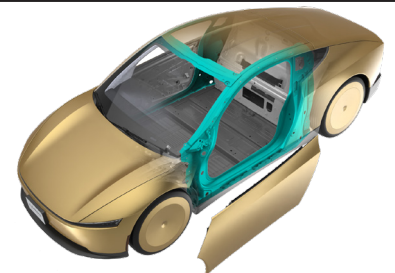

## 5. Stored Energy / Liquids / Gases / Solids



48V Li-Ion



All high voltage cables have ORANGE INSULATION.



400V Li-Ion



Never cut or open high voltage components or cables.



Coolant is orange.



TESLA Cybercab  
From 2026 - Present

ID No.

TESLA-2026CC-001

Version No.

01

Page No.

03/04





# TESLA CYBERCAB


From 2026—Present  
2 doors / 2 seats / coupe



## 6. In Case of Fire



 **DO NOT SUBMERGE VEHICLE TO EXTINGUISH/COOL BATTERY FIRE**

 **USE LARGE AMOUNTS OF WATER TO COOL THE BATTERY ENCLOSURE FROM THE BOTTOM OF THE VEHICLE**

 **POSSIBLE BATTERY RE-IGNITION!**


**MONITOR HV BATTERY TEMPERATURE FOR AT LEAST 24 HOURS**


## 7. In Case of Submersion



Treat a submerged Cybercab like any other submerged vehicle. Wear appropriate PPE for water rescue. Remove the vehicle from the water and continue with normal high voltage disabling. Vehicles submerged in water should be handled with a greater potential risk of an HV battery fire. Raise the front of the vehicle approximately 1 ft (30 cm) to allow water to drain out of the vehicle and battery pack and then store the vehicle flat.

## 8. Towing / Transportation / Storage

Hook the winch through **both** tow straps.  
Use a towing truck with flatbed.  
**NO** towing with running traction wheels.

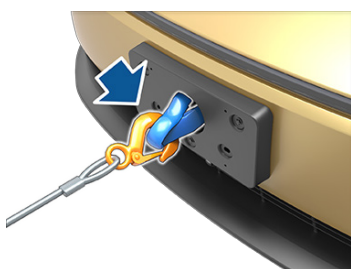 **HV BATTERY TEMPERATURE SHOULD BE CHECKED BEFORE TRANSPORT**



  **POSSIBLE BATTERY RE-IGNITION!**  
**AFTER A FIRE INCIDENT, STORE OUTSIDE AT A SAFE DISTANCE AT LEAST 50 FT (15 M) FROM OTHER VEHICLES, STRUCTURES, AND FLAMMABLE OBJECTS OR MATERIALS!**

To move the vehicle, request control of the vehicle from Tesla Robotaxi Support to briefly move the vehicle to a safer location. Must be in uniform and prepared to show identification to the camera on the B-pillar of the Robotaxi vehicle. Ensure that the vehicle is in Neutral before attempting to push the vehicle.

## 9. Important Additional Information

First responder information can be found at <https://www.tesla.com/firstresponders>. First responders and training officers with questions, contact [firstrespondersafety@tesla.com](mailto:firstrespondersafety@tesla.com) or [RobotaxiFirstResponderSafety@tesla.com](mailto:RobotaxiFirstResponderSafety@tesla.com).

Tesla provides vehicle data from accidents and incidents in response to requests from law enforcement. Such requests must be provided with the appropriate legal documentation, such as search warrants and subpoenas. For further instructions, see <https://ts.la/ler-guidelines>. To check registration or insurance of the vehicle, contact Tesla Robotaxi Support.

## 10. Explanation of Pictograms



In some working environments, the Infrared (IR) device is referred to as a Thermal Image Camera (TIC).